



PRODUCT GUIDE


Improved impact strength. Easy to cut and mould.



HIPS IS PERFECT FOR VACUUM FORMERS AND SCREEN PRINTERS WHO NEED TO TURN OUT HIGH QUALITY WORK ON A BUDGET.

It's also ideal for Point Of Sale producers wanting an 'easy print' surface in a range of colours, and great for demanding applications such as refrigerator liners, where a clean, bright appearance and food contact approval are vital.

All in all, HIPS offers guaranteed trouble-free processing, enhanced impact resistance, and, last but not least, enormous cost-efficiency.

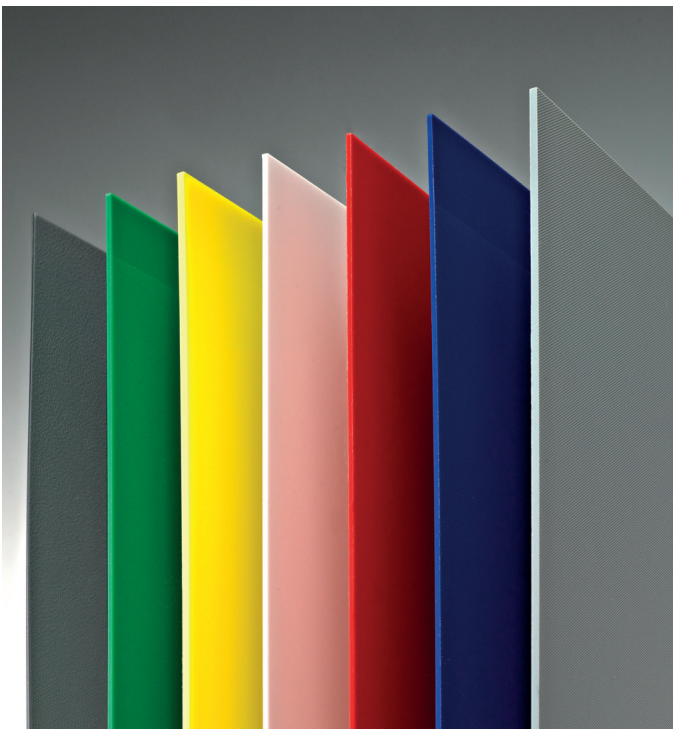

PRODUCT IDENTIFICATION

Polycasa® HIPS is a rubber modified polystyrene sheet that has improved impact strength and is easy to mould and cut to size.

The product is available with either a matt finish on both sides or a matt finish on one side, and glossy surface on the other. The standard colour is white, but a range of other colours is available, in addition to colour-matching to order.

We can also deliver sheet for special applications. These include, but are not limited to:

- UV treatment: improved colour stability and impact resistance.
- Environmental Stress Cracking Resistance (ESCR).
- Freon resistant grades for the refrigeration industry.
- Corona treatment: process to increase surface tension.

CHARACTERISTICS

- Superior surface quality.
- Excellent low temperature impact performance.
- Suitable for thermoforming.
- Smooth surface with a choice of finish: matt or glossy.
- Excellent for printing.
- Outstanding electrical insulation properties.
- Food contact approved – non UV version.
- Meets fire safety standard - UL standard 94HB.

APPLICATIONS

- Refrigerator liners.
- Sanitary ware.
- Bath panels.
- Shower wall panels.
- Vacuum formed parts.
- Screen printing substrate.
- Point Of Sale display units.
- Mobile home and caravan fittings.

PRODUCT RANGE

- Available with textured surface and a range of colours, subject to minimum order quantities.
- Patterns: smart and pinseal, leather and grain.
- Colours: white, opal white, yellow, red, green, blue, grey, black and silver, additional colours available on request.
- Sanitary colours: sanitary white, star white, pergamon and manhattan.
- The standard range of thickness is from 0.5 – 10.0 mm.

Please contact your local customer service centre for a complete product overview. For details see back of brochure.

TECHNICAL INFORMATION

GENERAL				
Property	Method	Unit	HIPS Glossy / Matt	HIPS Matt / Matt
Density	ISO 1183	g/cm ³	1.05	1.05
Burning resistance	UL standard 94		94 HB	94 HB
MECHANICAL				
Property	Method	Unit	HIPS Glossy / Matt	HIPS Matt / Matt
Flexural modulus	ISO 178	MPa	1850	1800
Flexural strength	SO 178	MPa	34	32
Tensile modulus	ISO 527-2	MPa	1730	1670
Tensile strength	ISO 527-2	MPa	24	20
Elongation at break	ISO 527-2	%	2.9	42
Stress at break	ISO 527-2	MPa	18	16
Ball indentation hardness	ISO 2039-1	N/mm ²	80	80
THERMAL				
Property	Method	Unit	HIPS Glossy / Matt	HIPS Matt / Matt
Vicat temperature (B 50)	ISO 306	°C	92	91
Heat deflection temperature (A)	ISO 75-2	°C	82	84
Linear thermal expansion	DIN 53752	K ⁻¹ x10 ⁻⁵	8	8
Service temperature continuous use	DIN 52612*	°C	70	70
Thermal conductivity	ISO 11501*	W/mK	0.16	0.16
Dimensional change on heating (4mm)	ISO 15015	%	5	5.5
ELECTRICAL (raw material specification)				
Property	Method	Unit	HIPS Glossy / Matt	HIPS Matt / Matt
Volume resistivity	IEC 93	Ω.cm	>10 ¹⁶	>10 ¹⁶
Surface resistivity	ICE 93	Ω	>10 ¹³	>10 ¹³
Dielectrical strength	IEC 243-1	KV/mm	155	155
Dielectrical constant at 100Hz- 1 MHz	IEC 250		2.5	2.5
Dissipation factor at 100Hz- 1 MHz	IEC 250		>10 ⁻⁴	>10 ⁻⁴
IMPACT STRENGTHS				
Property	Method	Unit	HIPS Glossy / Matt	HIPS Matt / Matt
Charpy notched glossy side impacted	ISO 179-1/1fA	KJ/m ²	9	-
Charpy notched matt side impacted	ISO 179-1/1fA	KJ/m ²	6	10

Note: all mentioned data is based on extruded sheets in a thickness of 4 mm.

These technical data of our products are typical ones; the actually measured values are subject to production variations.



For further information on the wide range of **Polycasa** products please contact us as follows;

UK and Ireland

T: 00 32 14 57 67 11

France, Italy, Greece and Cyprus

T: 00 32 14 57 67 11

Germany, Austria, Switzerland

T: 00 49 61 31 63 11 82

Spain and Portugal

T: 00 34 93 565 12 30

Central and Eastern Europe

T: 00 421 41 707 14 20 – 24

Benelux, Scandinavia and all other countries

T: 00 32 14 57 67 11

Polycasa N.V.

Van Doornelaan 2a
BE 2440 Geel
Belgium

T: 00 32 14 57 67 11

F: 00 32 14 58 96 21

E: info@polycasa.com

W: www.polycasa.com

Polycasa offers an extensive range of plastic sheets to distribution and industrial partners, with an industry leading selection of polymers, thicknesses, sizes, colours, patterns, and coatings.



 **CAST**  **XT**  **AKRYLON**  **ACRYL**  **PS**  **HIPS**  **SAN**  **SPC**  **PC**  **APET**  **PETG**  **LENTICULAR**

While we have made every effort to ensure the accuracy of the information it is provided on an "as is" basis and without liability, particularly including (but not limited to) liability with regard to any up to date status, completeness or correctness of the information or any liability for the merchantability of products, their fitness for any particular purpose, or the infringement of third party rights. Colours of the products are for indication purposes only and may not represent the colour of the actual product. Any opinions provided in the Product Guide are not statements or representations of fact and they are not intended to form part of any offer or contract. © **Polycasa N.V.**, a member of 3A Composites, 2016, all rights reserved.